

SINOMACH

630A

SINOMACH-HI International Equipment Co.,Ltd.

Optional Attachment



Wheel Loader



Motor Grader



Excavator



Backhoe Loader



Vibratory Roller



Truck Mounted Crane



Bulldozer



Paver



Skid Steer

额定功率(Rated Power): 74kw@2200rpm

操作重量(Operating Weight): 7600Kg



- Equipped with WEICHAI engine
- 4 forward & 4 reverse synchromesh mechanical shift transmission
- Combined seal cylinder obtains high seal performance and more reliability
- Improved loader and backhoe performance
- CARRARO wet type rear axle with multi-disc brake & CARRARO front axle
- New-type cab with more space, increases comfort and visibility
- With 2 WD or 4 WD for option



SINOMACH-HI International Equipment Co.,Ltd.

Add:No.898, West Huanghe Road, Changzhou, Jiangsu,

P.R.of China

P.C:213136

Tel:86-519-86781288 86752400

Fax:86-519-86781387

[Http://www.sinomachglobal.com](http://www.sinomachglobal.com)

E-mail:sales@changlin.com.cn service@changlin.com.cn

2023.02



国机重工集团国际装备有限公司
SINOMACH-HI International Equipment Co.,Ltd.

630A Backhoe Loader Main Specifications

挖掘机主要技术参数

国机重工
SINOMACH



发动机(Engine)



型号(Model).....	WEICHAI WP4.1G100E311 TIER III
型式.....	电喷、增压、水冷
Type.....	Electronic injection,turbocharging,water cooling
额定功率Rated Power.....	74kW
额定转速Rated Speed.....	2200rpm



转向 (Steering System)

前轮转向，负荷传感优先转向方式

The front steering wheels are controlled by load sensing priority valve steering system.
最小转弯半径.....4380mm
Min.turning radius at the outer of front wheel.....4380mm

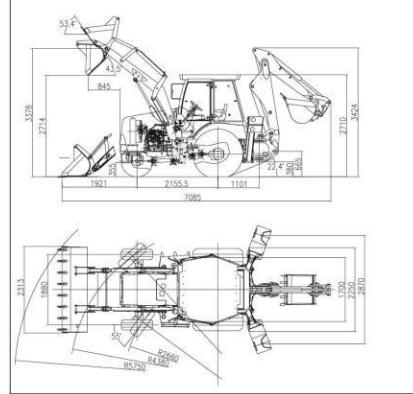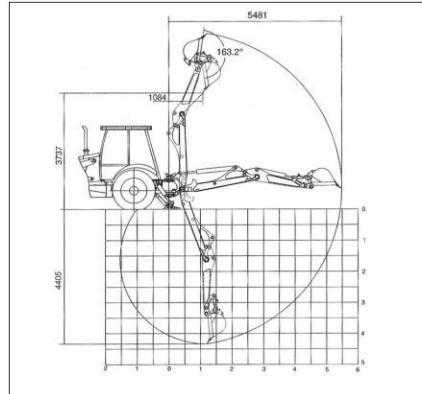

变速系统 (Transmission System)

进口双变、同步机械换档

Imported T/C & T/M, synchromesh mechanical shift

行驶速度(km/h) Traveling speed (at rated engine rpm)

I II III IV

Forward(km/h) 6.0 9.6 20.5 38

Reverse(km/h) 6.0 9.6 20.5 38




装载作业性能 (Loader Performance)

Rated bucket capacity.....1m³
Max. dumping clearance.....2714mm
Max. dumping reach.....845mm
Max. breakout force.....>60kN



反铲作业性能 (Backhoe Performance)

Rated hoe bucket capacity.....0.3m³
Max. digging depth.....4405mm
Max. digging force.....50±10%kN
Max. digging radius.....5481mm
Max. dumping height.....3737mm

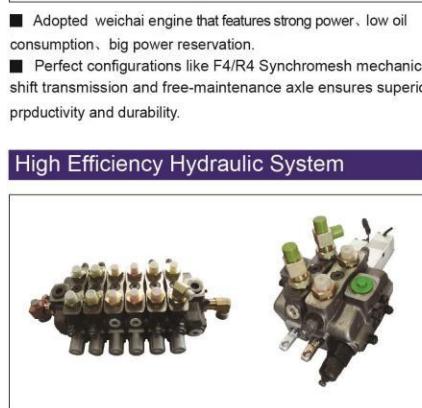

制动 (Brakes)

独立的2个制动踏板，单个踏板制动作用后轮单侧油盘制动器，双制动踏板同时作用制动后轮。

Oil immersed disc brakes are actuated by individual braking on each side rear wheel with two separate pedals. Integral brake on rear wheel is actuated by operating the two pedals at the same time.

停车制动：软轴操纵机械作用半轴制动。

Parking brake: flexible shaft control mechanical applied axle shaft braking.



轮胎 (Tyre)

前轮 Fore tire size.....12-16.5TL-12PR RG400
后轮 Rear tire size.....19.5L-24TL-12PR R-4



前后桥 (Front and Rear Axles)

采用进口著名品牌的桥，重载桥轮边采用行星减速，前桥摆动角为11°。后桥差速器通过装载手柄上的开关采用电液控制。

Adopted imported well-known brand axles, Heavy duty axles with planetary reduction gears in the wheel hubs. Front axle total oscillation angle is 11°. Differential lock in the rear axle controlled by electro-hydraulic system with a switch on loader lever

最小离地间隙 Min.ground clearance.....275mm(4WD)/355mm(2WD)

最大爬坡能力 Max. gradient capacity.....>30%

■ Adopted reliable hydraulic components make operation more stable and quick action and more precise.